
## **IDD Series – Direct Dome Light Illumination**

The LEDs are mounted inside of a dome. Strong irradiation can be made at whole angles and extreme bright light.

Camera

Object

Application: SMD LED inspection, SMD resistor, crack and chip

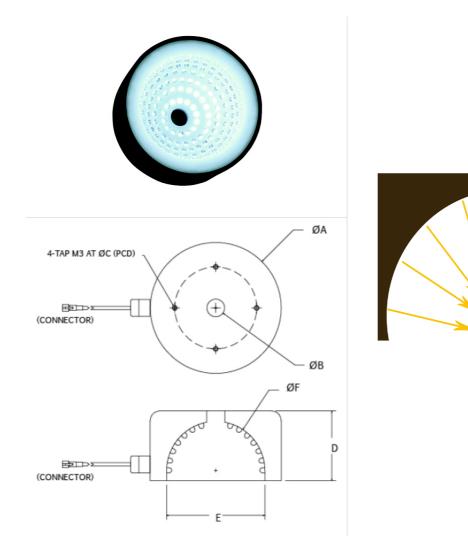

Model	Dimensions (mm)						Color	Voltago / Watt	Current
	ØA	ØВ	ØC	D	Е	ØF	COLOR	Voltage/ Watt	Current
IDD-00-045-4-X	55	12	40	23.5	40	40	۰.	24V / 2.88W	120mA
							i <b>(</b> , i <b>(</b> ), i <b>(</b> ),	24V / 3.60W	150mA
IDD-00-075-7-X	80	11	50	42.5	60	60	۰.	24V / 7.92W	330mA
							i 🖲 i 🔘 i O,	24V / 10.08W	420mA