

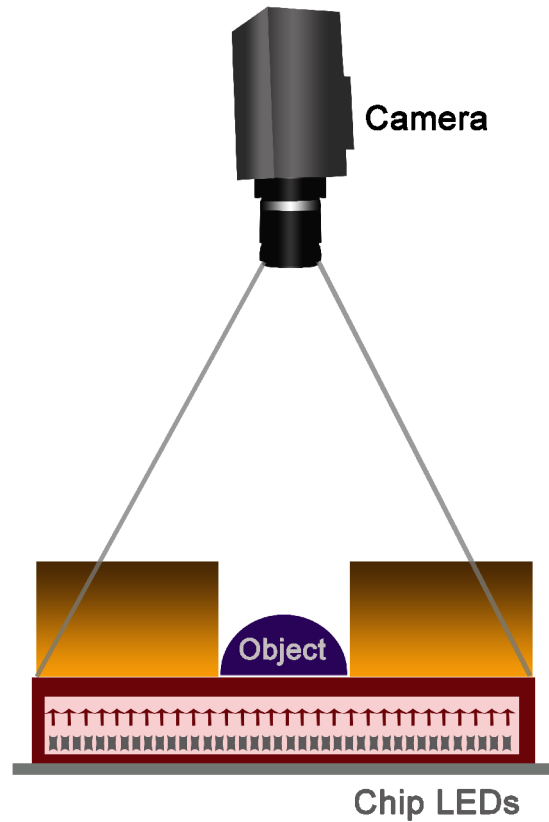


BHLX3 Series – High Intensity Back Light

The BHLX3 series provides a wide area of diffused back light.

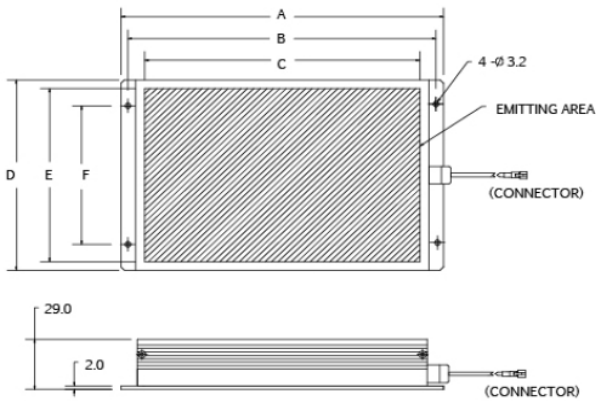

Model	Dimensions (mm)							Color	Voltage/ Watt	Current
	A	B	C	D	E	F	G			
BHLX3-00-160X160-X-X	196,0	188,0	160,0	178,0	160,0	140,0	19,0	●	24V / 12.96W	540mA
								● ● ○	24V / 17.28W	720mA
BHLX3-00-160X240-X-X	276,0	268,0	240,0	178,0	160,0	140,0	19,0	●	24V / 19.44W	810mA
								● ● ○	24V / 25.92W	1080mA
BHLX3-00-160X320-X-X	356,0	348,0	320,0	178,0	160,0	140,0	19,0	●	24V / 25.92W	1080mA
								● ● ○	24V / 34.56W	1440mA
BHLX3-00-160X400-X-X	436,0	428,0	400,0	178,0	160,0	140,0	19,0	●	24V / 32.40W	1350mA
								● ● ○	24V / 43.20W	1800mA
BHLX3-00-240X240-X-X	276,0	268,0	240,0	258,0	240,0	140,0	59,0	●	24V / 29.16W	1215mA
								● ● ○	24V / 38.88W	1620mA
BHLX3-00-240X320-X-X	356,0	348,0	320,0	258,0	240,0	140,0	59,0	●	24V / 38.88W	1620mA
								● ● ○	24V / 51.84W	2160mA
BHLX3-00-240X400-X-X	436,0	428,0	400,0	258,0	240,0	140,0	59,0	●	24V / 48.60W	2025mA
								● ● ○	24V / 64.80W	2700mA
BHLX3-00-320X320-X-X	356,0	348,0	320,0	338,0	320,0	300,0	19,0	●	24V / 51.84W	2160mA
								● ● ○	24V / 69.12W	2880mA
BHLX2-00-320X400-X-X	436,0	428,0	400,0	338,0	320,0	300,0	19,0	●	24V / 64.80W	2700mA
								● ● ○	24V / 86.40W	3600mA
BHLX2-00-400X400-X-X	436,0	428,0	400,0	418,0	400,0	360,0	29,0	●	24V / 81.00W	3375mA
								● ● ○	24V / 108.00W	4500mA

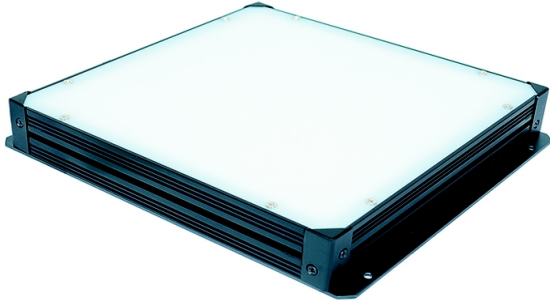